


# Stripnail Coding Chart



Example: DA25EAB-FC

1ST DIGIT DIAMETER & GAUGE		2ND DIGIT HEAD/SHANK CONFIGURATION		3RD DIGIT LENGTH (mm) US			5TH DIGIT POINT	
A	18 ga., 1,2 mm	A	Brad head	46	35 mm	16	A	Diamond
B	2,5 mm	B	Barbed, full round head	47	40 mm	18	B	Blunt dia
C	23 ga., 0,68 mm	C	Flat head, smooth shank, clipped head	49	45 mm	19	C	Blunt
D	15 ga., 1,8 mm	D	Flat head, smooth shank, plastic collated, full round head	51	50 mm	21	D	Blunt chisel
E	2,3 mm	E	Flat head, ring shank, clipped head	52	55 mm	22	E	Sharp chisel
F	2,46 mm	F	Flat head, screw shank, clipped	54	60 mm	24	F	Chisel
G	2,87 mm	H	"T" head, smooth shank, full round head	55	65 mm	25	G	Semi-blunt
H	3,1 mm	K	Flat head, screw shank, plastic collated, full round head	56	70 mm	26	H	Clinch point
K	3,3 mm	L	Flat head, ring shank, plastic collated, full round head	57	75 mm	27		
M	3,8 mm	N	Full round head metal connector nail, aggressive ring, DIN1052	58	80 mm	28		
N	4,1 mm	P	Full round head metal connector nail, aggressive ring	59	90 mm	29		
O	4,2 mm	Q	Flat head, 1/3rd ring shank, full round head	60	100 mm	31		
P	2,2 mm	S	Flat head, ring shank, dome full round head	61	110 mm	32		
Q	3,4 mm	V	Bugle head, ring shank, metal connector 34°	62	115 mm	33		
R	1,6 mm	W	L cleat head, barded shank	63	120 mm	34		
T	4,6 mm	X	Medium head pin	64	125 mm	35		
U	2,0 mm	Y	Slight head pin	65	130 mm	36		
V	2,6 mm	Z	Headless pin	66	135 mm	37		
1	2,8 mm	5	Offset full round head, smooth	67	140 mm	38		
2	4,5 mm	6	Offset full round head, ring	68	145 mm	39		
				69	150 mm	40		
				70	160 mm	41		

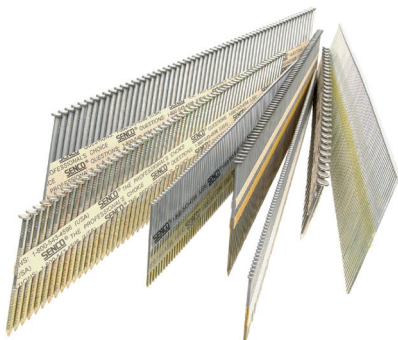


# Stripnail Coding Chart



Example: DA25EAB-FC

6TH DIGIT WIRE CHEMISTRY & FINISH		7TH DIGIT FINISH		8TH DIGIT FEATURES	
A	Regular galvanised std tensile	A	Plain	E	24 Degree strip angle
B	Regular galvanised olive drab	B	Sencoted	I	Special leg feature
C	Liquor finish	C	Painted	J	Special head feature
D	"Wheatherex II" galvanised	D	Painted / sencoted	K	Short strip
E	"Everguard"	E	Coated by verdor	L	Plastic collation strip with 7,5mm pithc
G	Stainless steel, aisi 304 (a2)	S	New glue	M	Full round head nail, plastic collated 34 degree
H	Bright basic, heat-treated			N	Carton / label / count change
I	Regular galvanised, heat-treated			P	Bulk pack
J	Hot-dipped galvanised - corrosivity class 2			R	Retail packaging
K	Hot-dipped galvanised - corrosivity class 4			S	Frh, plastic collated 20 degree angled
M	Aluminium			T	Full round head nail, paper collated 20 degree angled metal connector
P	Bright basic, std tensile			X	Half strips - retail packaging
Q	Bright basic, med carbon			4	17 Degree strip angle
R	Regular galvanised, yellow chromated				
S	Hot-dipped galvanised - corrosivity class 3				
T	"Flash" galvanised or greater				
U	Stainless steel, aisi 316 (a4)				
Z	Bronze				

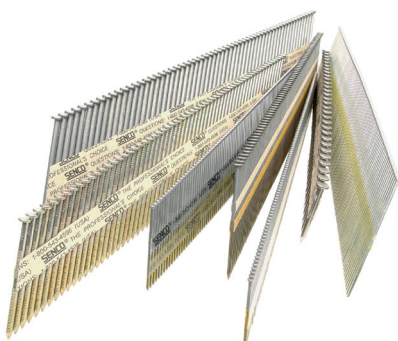

# Stripnail Coding Chart



Example: DA25EAB-FC

9TH DIGIT SPECIAL FEATURES		10TH DIGIT OTHER	
G	Stainless steel welding wire	-FC	Fuel cell
K	Short strip	R	Retail packaging
R	Retail packaging		
W	Waterproof packaging		

